

ITCB Twin HV PE, 120/240V

Height: 35.0" Width: 20.2" Depth: 24.0"
(88.9cm) (51.3cm) (61.0cm)



- 4.3" Color Touchscreen aides in customizing recipes, brewing options and control
- The QWERTY key pad feature allows for easy customization of recipe names in English, Spanish and French
- SmartWAVE sprayhead technology provides enhanced uniformity of extraction and lime scale reduction
- Customers can easily add up to 10 screensaver images to advertise and promote their brand and products
- USB port for easy programming
- Brews into 1.5gal and 1.0gal BUNN ThermoFresh® servers for coffee and TD4T, TDO and TDO-N tea dispensers
- Dilution feature also allows for brewing iced coffee
- Includes both coffee (Stainless) and tea (Plastic) funnels
- Tea brewing capability built-in with integrated dilution nozzle, software and Quick Brew tea brewing funnel
- BrewWISE® intelligence with pre-infusion and pulse brew for maximum flavor extraction
- Digital temperature control and cold brew lockout
- Energy-saver mode reduces tank temperature during idle periods
- Large 5.6gal (21.2L) tank provides back- to-back brewing capacity at 120/208-240V applications
- Brews coffee or tea on both sides - Mix and Match to meet your needs

Agency:



Specifications

Product #: 54100.0100

Water Access: Plumbed

Finish: Stainless

Funnel: Stainless Steel

Additional Features

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ₂ O Temp.	Phase	# Wires plus Ground	Hertz
120/240	25	6000	Yes/	-	672	60°F (15.5°C)	1	3	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" BSPP	1.25


CAD Drawings

2D	Revit	KLC
●		



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
02/20/2020

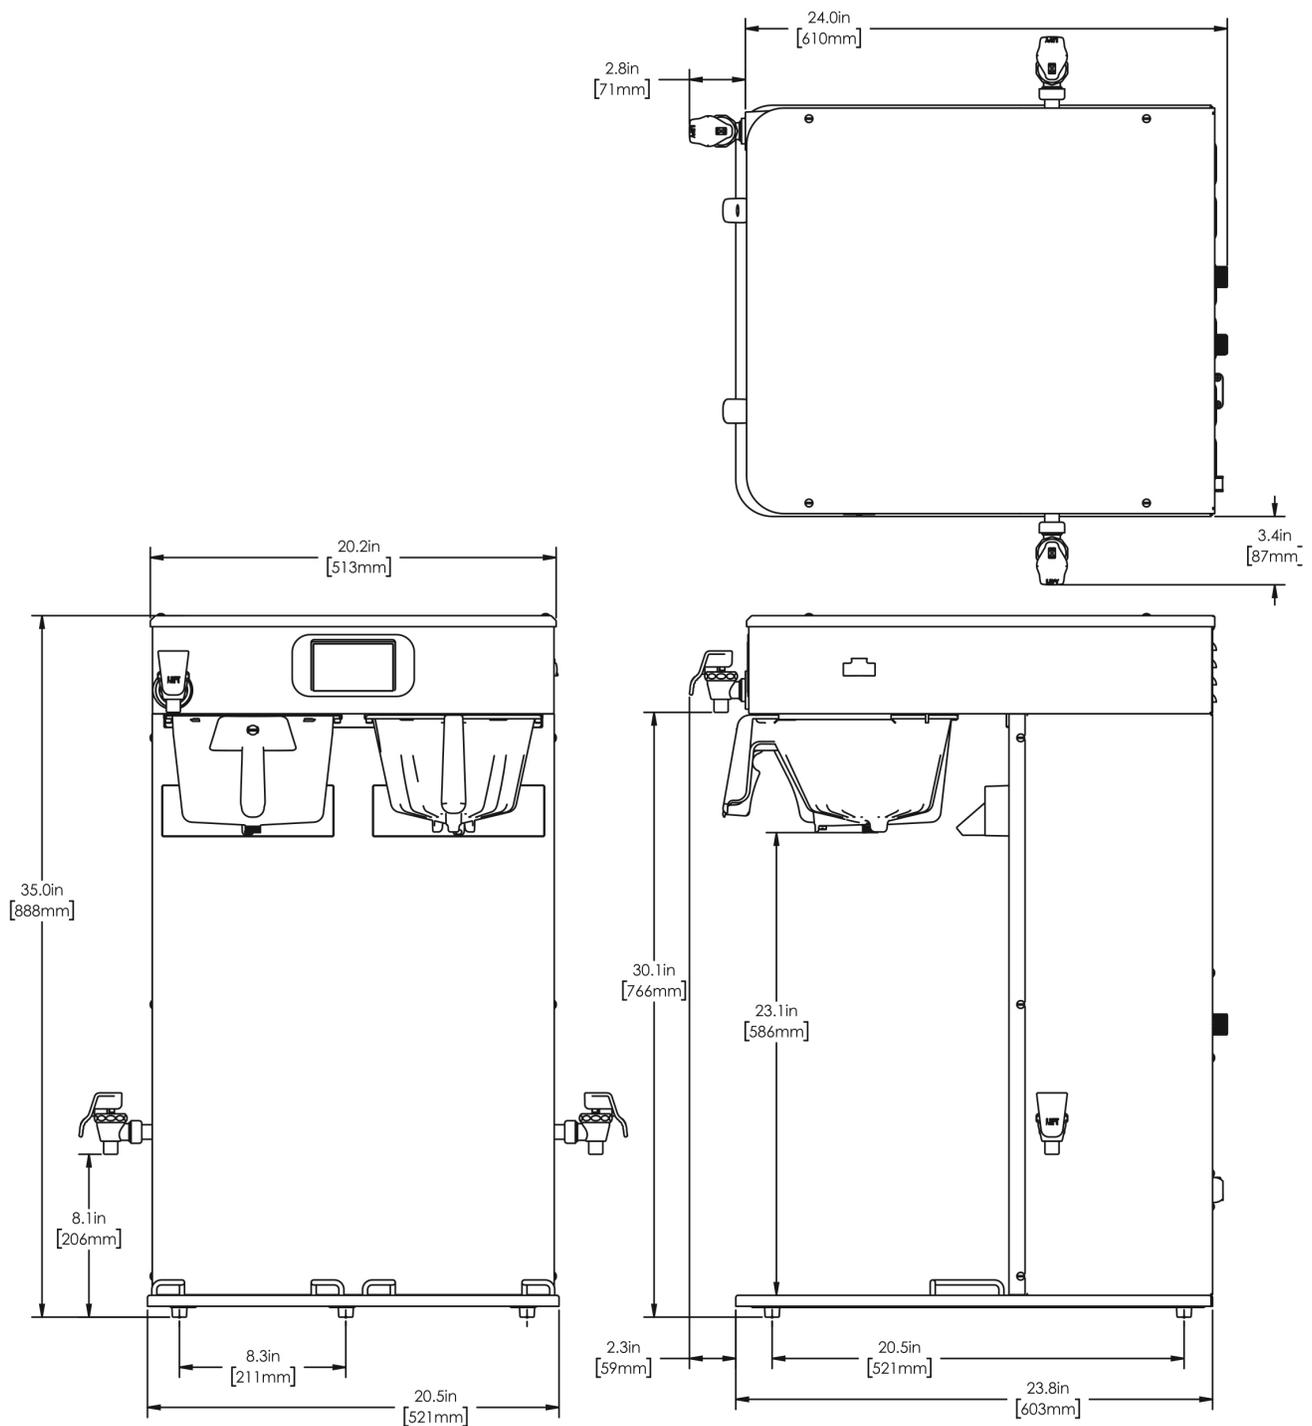

	Unit			Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	35.0 in.	20.2 in.	24.0 in.	38.3 in.	24.4 in.	28.6 in.	74.690 lbs	15.411 ft ³
Metric	88.9 cm	51.3 cm	61.0 cm	97.2 cm	61.9 cm	72.6 cm	33.879 kgs	0.436 m ³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated:
02/20/2020